

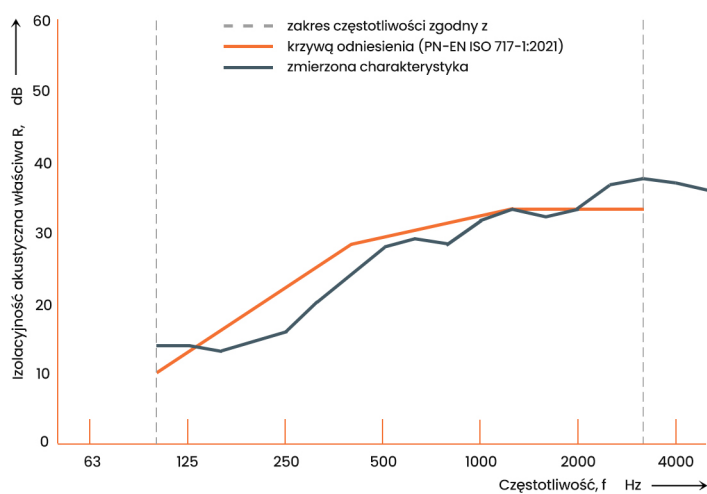
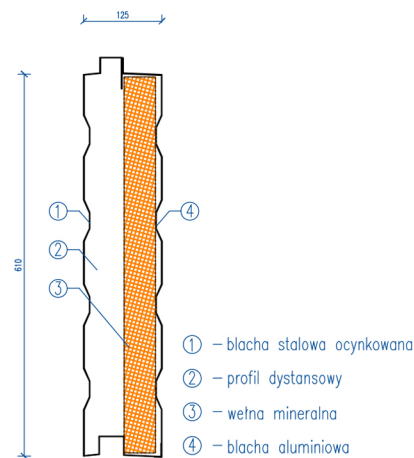


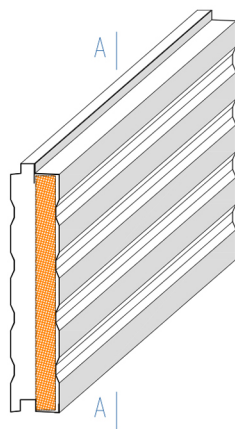

częstotliwość f [Hz]	R 1/3 oktawy [dB]
50	-
63	-
80	-
100	13.7
125	13.7
160	13.0
200	14.2
250	15.7
315	20.1
400	23.7
500	27.6
630	28.8
800	28.1
1000	31.3
1250	33.1
1600	31.9
2000	33.2
2500	36.5
3150	37.3
4000	36.8
5000	35.7

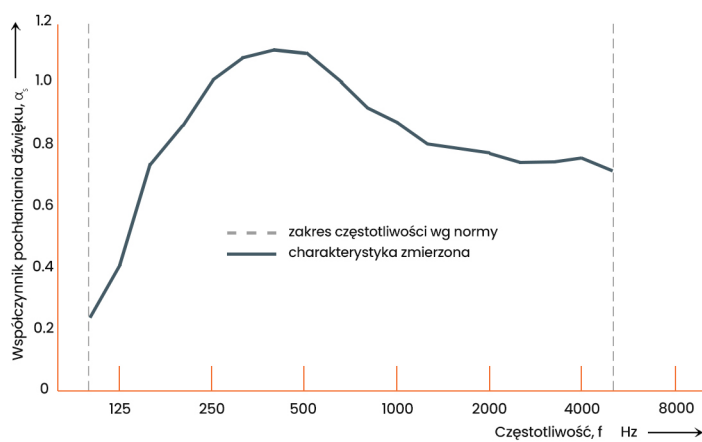

częstotliwość f [Hz]	T_1 [s]	T_2 [s]	α_s [s]	α_p [s]
100	5.93	3.98	0.23	0.45
125	4.97	2.91	0.40	
160	4.73	2.14	0.73	
200	5.13	2.02	0.85	1.00
250	5.10	1.81	1.01	
315	5.96	1.83	1.08	
400	6.28	1.82	1.11	1.00
500	6.47	1.84	1.10	
630	6.45	1.94	1.02	
800	6.41	2.09	0.92	0.85
1000	6.62	2.18	0.87	
1250	6.64	2.31	0.80	
1600	6.21	2.27	0.79	0.75
2000	5.35	2.18	0.77	
2500	4.75	2.13	0.74	
3150	3.98	1.96	0.74	0.75
4000	3.26	1.75	0.75	
5000	2.43	1.51	0.71	

PARAMETRY GŁÓWNE:

zaluzeakustyczne.pl

GRUBOŚĆ PANELA	125 mm	rodzaj podparcia – słupy konstrukcji stalowej HEA 160	IZOLACYJNOŚĆ AKUSTYCZNA (C ; C_{tr})	$R_w = 29$ dB (-2;-6)
MASA ZABUDOWY	20 kg/m ³		WSPÓŁCZYNNIK α_w	0.85